
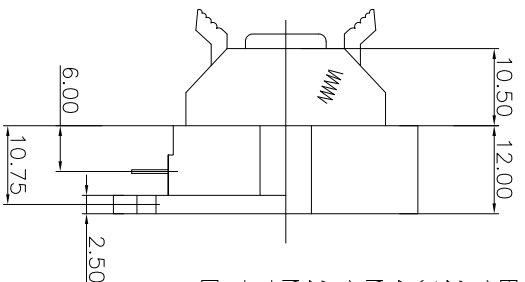
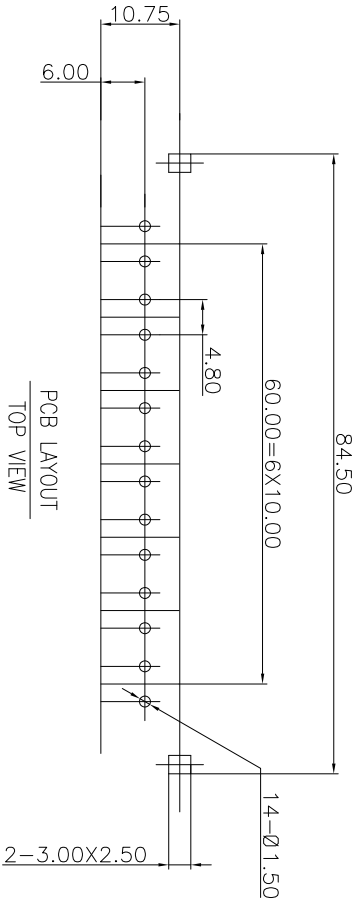


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

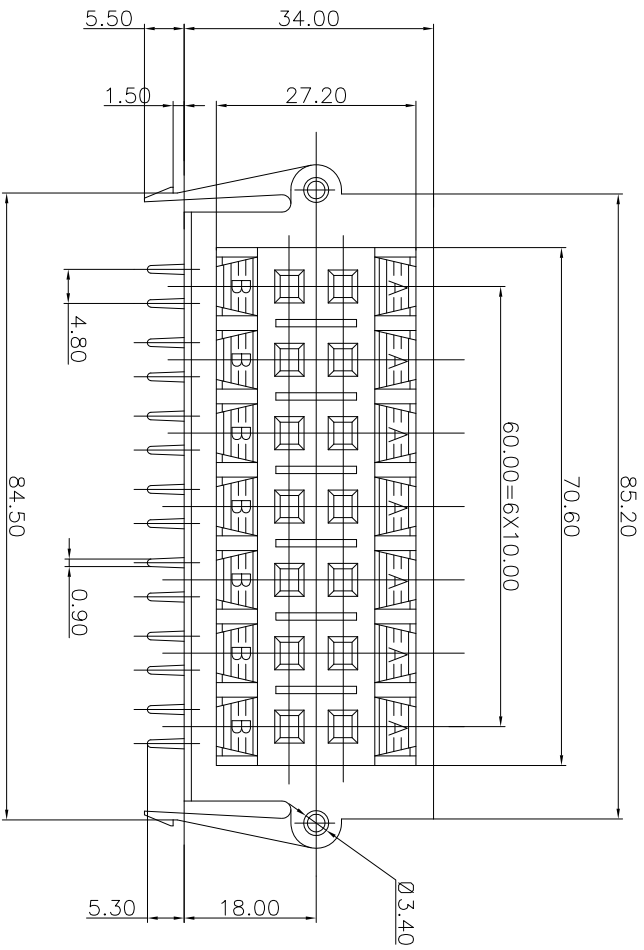


NOTES:

ELECTRICAL:

- 1:RATED CURRENT: 3A Max.
- 2:RATED VOLTAGE: 50V AC.
- 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
- 4:DILECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.

MECHANICAL:

- 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
- 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

ANGLE	±5°	MODEL NAME: WP14-11	 广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.	TITLE: WP PUSH TERMINAL	REV.: A
63 < L	±0.5	(PART NO.)		DWG NO.:	SIZE: A3
16 < L ≤ 63	±0.4	MAT'L: See table		VIEW: 5:1	SHEET: 1/1
4 < L ≤ 16	±0.3	FINISH: See table	Q'TY: /	APPROVED: X.Q.Hu 08/16/18	UNIT: mm
L ≤ 4	±0.2	DESIGN: X.H.Wang 08/16/18	CHECKED: L.W.Wu 08/16/18	APPROVED: X.Q.Hu 08/16/18	UNIT: mm
TOL TABLE:		THIS DOCUMENT IS THE PROPERTY OF ZHENHUI ELECTRONICS CO.,LTD. PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER			