

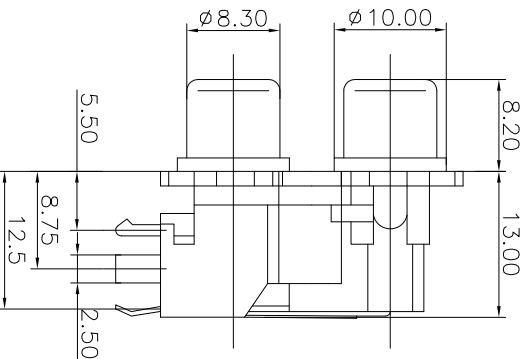
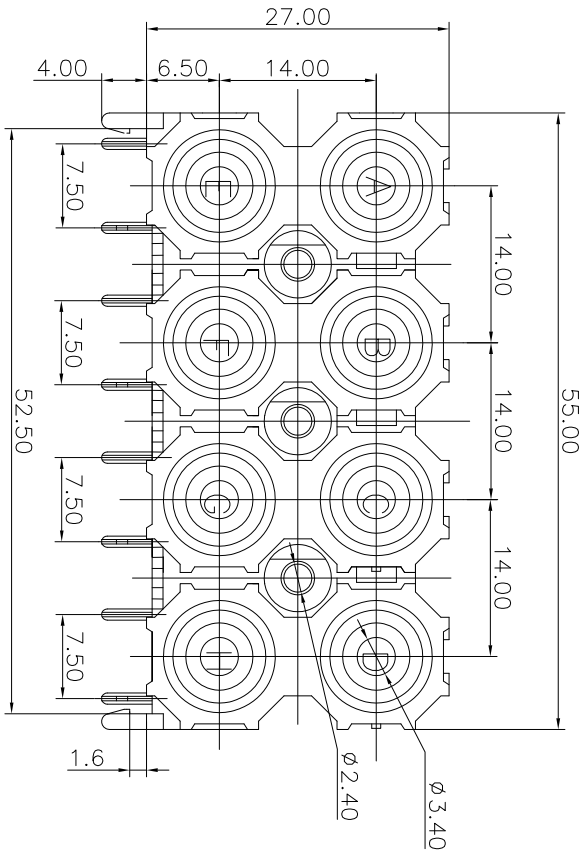



REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

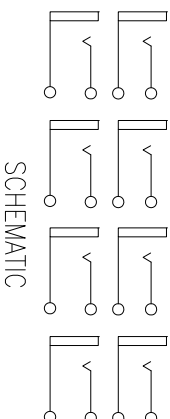

- NOTES:
- ELECTRICAL:
- 1.RATED CURRENT: 0.2A Max.
 - 2.RATED VOLTAGE: 50V AC.
 - 3.CONTACT RESISTANCE: 30 MILLIOHMS Max.
 - 4.INSULATION RESISTANCE: 100 MEGAOHMS Min.
 - 5.DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1.INSERTION FORCE: 3N-30N.
 - 2.WITHDRAWAL FORCE: 3N-30N.
 - 3.DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

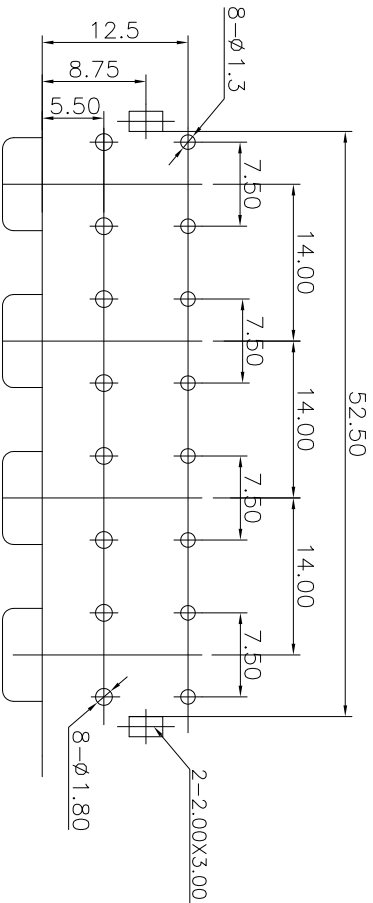

PCB LAYOUT
TOP VIEW

ANGLE	±5°	MODEL NAME: RCA-813F (PART NO.)	GUANGDONG TRENDPRO TECHNOLOGY CO., LTD.	REV.: A
63 < L	±0.5			
16 < L ≤ 63	±0.4			
4 < L ≤ 16	±0.3			
L ≤ 4	±0.2			
TOL TABLE:				
THIS DOCUMENT IS THE PROPERTY OF TRENDPRO TECHNOLOGY CO., LTD.NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				
MAT'L:	See table	DESIGN: X.H.Wang	11/24'18	TITLE: RCA PIN JACK
FINISH:	See table	CHECKED: L.W.Wu	11/24'18	DWG NO.:
Q'TY./		APPROVED: X.Q.Hu	11/24'18	UNIT: mm
				VIEW: 5:1
				SCALE: SHEET: 1/1
				SIZE: A3