

REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	




NOTES:

ELECTRICAL:

- 1:RATED CURRENT: 3A Max.
- 2:RATED VOLTAGE: 50V AC.
- 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
- 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.

MECHANICAL:

- 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
- 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

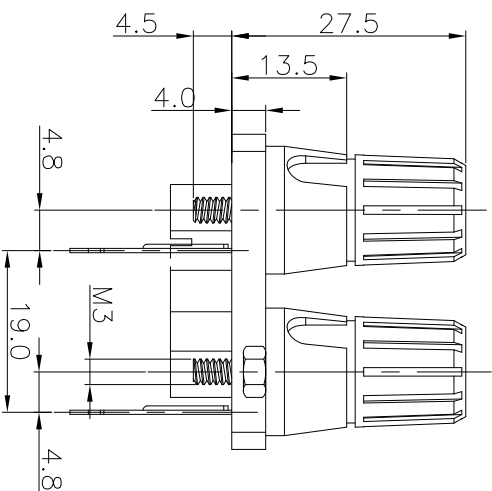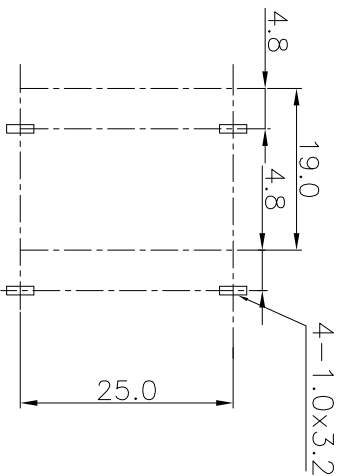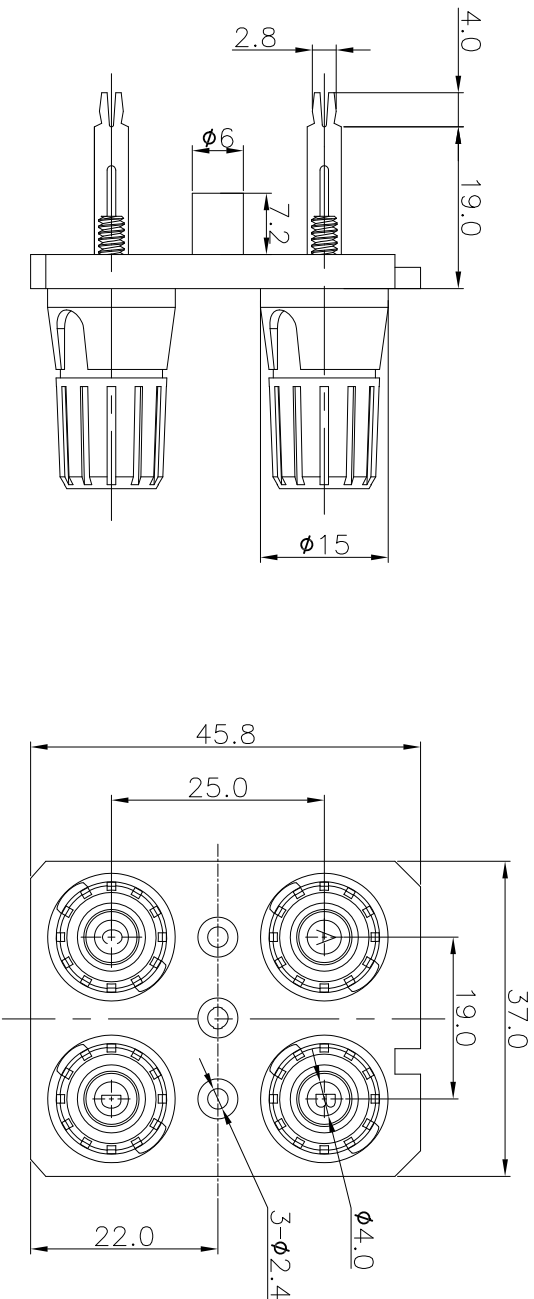

PCB LAYOUT
TOP VIEW

ANGLE	±5°	MODEL NAME: WP4-11 (PART NO.)	广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO., LTD.	REV.: A
63 < L	±0.5			
16 < L ≤ 63	±0.4			
4 < L ≤ 16	±0.3			
L ≤ 4	±0.2			
TOL TABLE:		MAT'L:	DESIGN: X.H.Wang 11/06'18	TITLE: WP PUSH TERMINAL
		FINISH:	CHECKED: L.W.Wu 11/06'18	DWG NO.:
		Q'TY: /	APPROVED: X.Q.Hu 11/06'18	UNIT: mm
				VIEW: 5:1
				SCALE: SHEET: 1/1
				SIZE: A3