

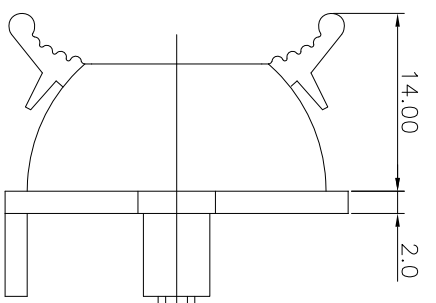
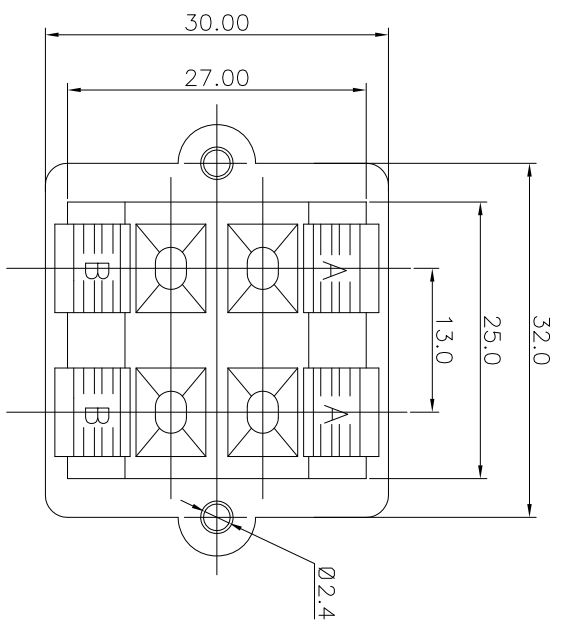



| | | | |
|------|---------|---------------|----------|
| REV. | ECN NO. | MODIFIED MARK | APPROVED |
| A | — | FIRST RELEASE | |

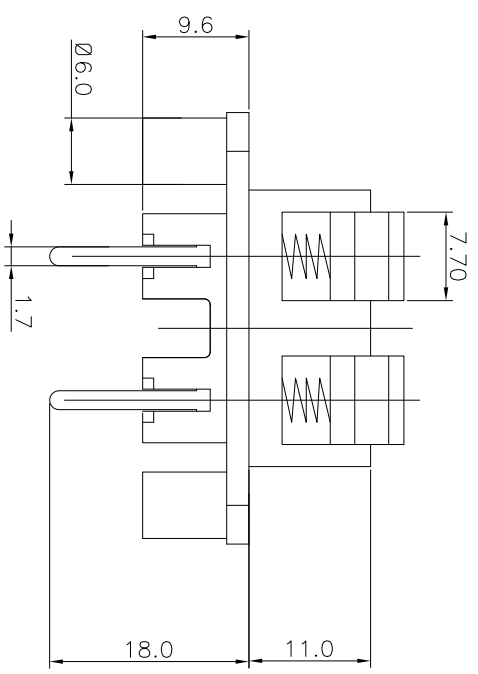

- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 3A Max.
 - 2: RATED VOLTAGE: 50V AC.
 - 3: INSULATION RESISTANCE: 100 MEGAΩHMS Min.
 - 4: DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.
- MECHANICAL:
- 1: WIRE IN HOLD FORCE 5N (20#WIRE) MIN
 - 2: INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.
 - 3: APPLY 2kgf FORCE AT ANY DIRECTION, THERE NO LOOSE & NO CRACK

PCB LAYOUT
TOP VIEW

| | | | |
|---|------|---------------------------|---|
| ANGLE | ±5° | MODEL NAME: WP4-5 |  广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO., LTD. |
| 63 < L | ±0.5 | (PART NO.) | |
| 16 < L ≤ 63 | ±0.4 | DESIGN: X.H.Wang 11/06'18 | TITLE: WP PUSH TERMINAL |
| 4 < L ≤ 16 | ±0.3 | MAT'L: See table | CHECKED: L.W.Wu 11/06'18 |
| L ≤ 4 | ±0.2 | FINISH: See table | DWG NO.: |
| TOL TABLE: | | Q'TY: / | APPROVED: X.Q.Hu 11/06'18 |
| THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER | | UNIT: mm | VIEW: 5:1 |
| | | SCALE: SHEET: 1/1 | REV.: A |
| | | SIZE: A3 | |