

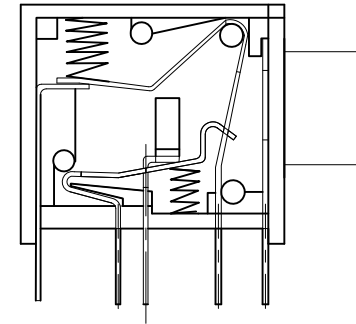
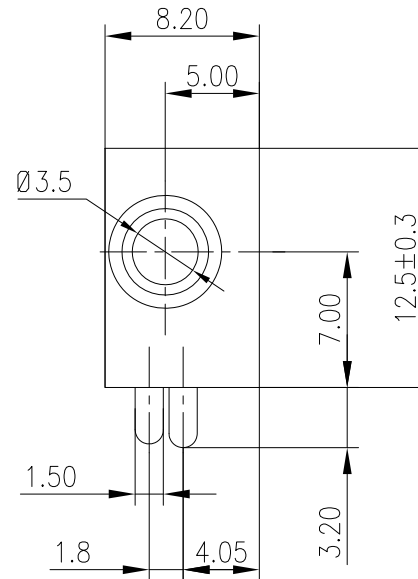
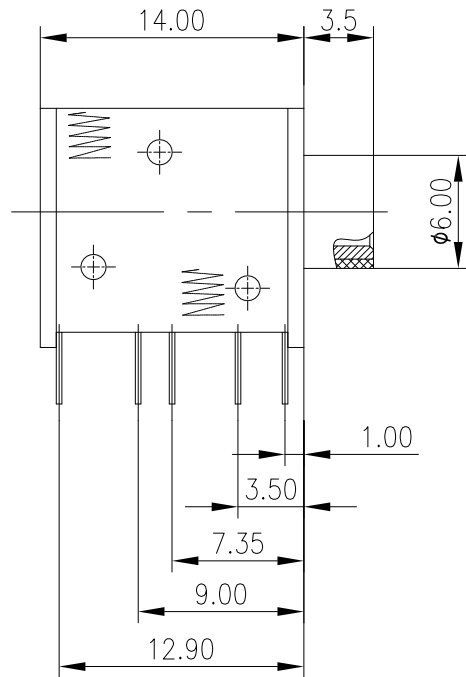


7		8	
REV.	ECN NO.	MODIFIED MARK	APPROVED
A	_____	FIRST RELEASE	



INTERNAL CONSTRUCTION

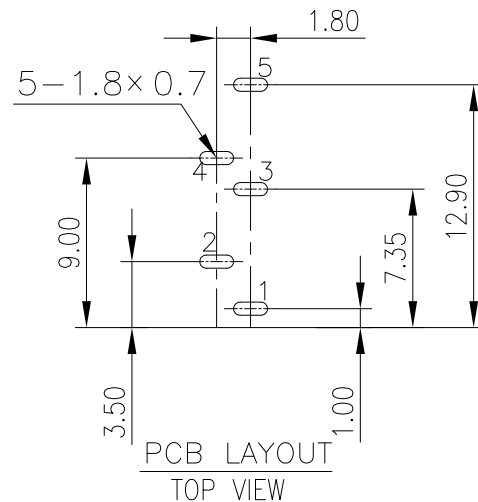

SCHEMATIC

NOTES:

ELECTRICAL:

1:RATED CURRENT: 1A Max.

2:RATED VOLTAGE: 30V AC.

3:CONTACT RESISTANCE: 100 MILLIOHMS Max.

AFTER TESTING:100 MILLIOHMS Max.

4:INSULATION RESISTANCE: 100 MEGAOHMS Min.

5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:

1:INSERTION FORCE: 3N-25N.

2:WITHDRAWAL FORCE: 3N-25N.

3:DURRABILITY: 5000 CYCLES.

ENVIRONMENTAL:

TEMPERATURE RANGE: -20°C TO 60°C.

ANGLE		±5°	MODEL NAME: SJ3510A (PART NO.)			广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.								
63 < L		±0.5												
16 < L ≤ 63		±0.4												
4 < L ≤ 16		±0.3												
L ≤ 4		±0.2	MAT'L: See table	DESIGN: Z.F.Lian 08/16'18	TITLE: 3.5 PHONE JACK									
TOL TABLE:		FINISH: See table								CHECKED: L.W.Wu 08/16'18	DWG NO.:			REV.: A
THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO. LTD., NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER														
Q'TY: /		APPROVED: X.Q.Hu 08/16'18	UNIT: mm	VIEW: 	SCALE: 5:1	SHEET: 1/1	SIZE: A3							