

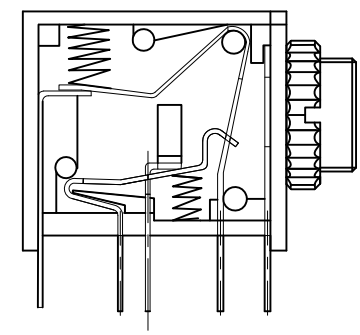
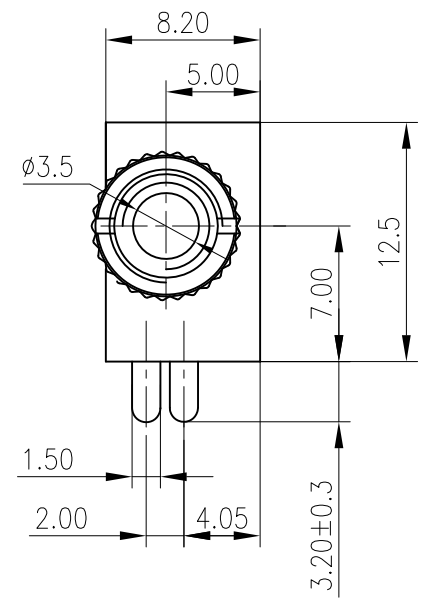



REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

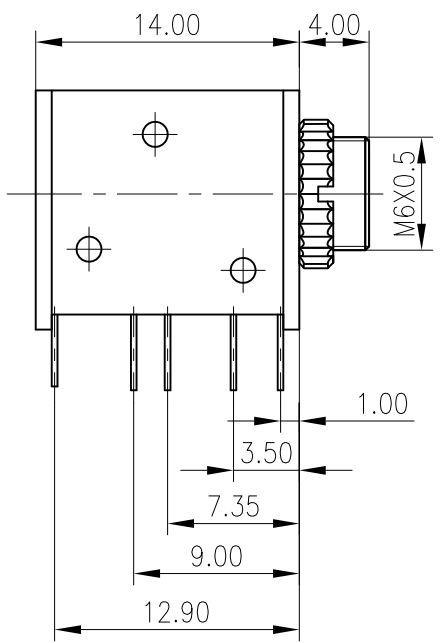


INTERNAL CONSTRUCTION

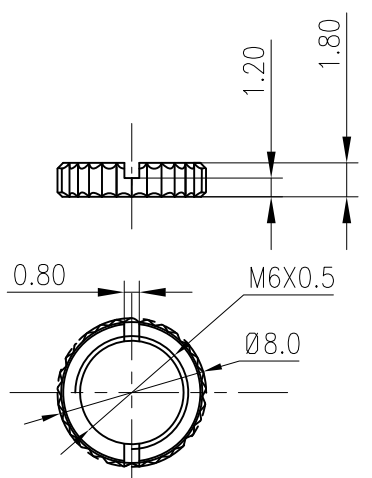

NUT

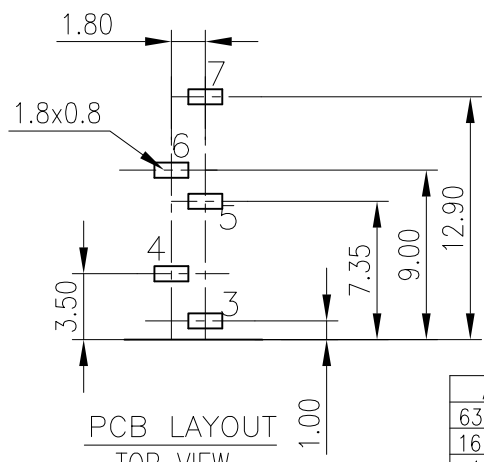



PCB LAYOUT
TOP VIEW



SCHEMATIC

NOTES:
 ELECTRICAL:
 1:RATED CURRENT: 1A Max.
 2:RATED VOLTAGE: 30V AC.
 3:CONTACT RESISTANCE: 100 MILLIOHMS Max.
 AFTER TESTING:100 MILLIOHMS Max.
 4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
 5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
 MECHANICAL:
 1:INSERTION FORCE: 3N-25N.
 2:WITHDRAWAL FORCE: 3N-25N.
 3:DURRABILITY: 5000 CYCLES.
 ENVIRONMENTAL:
 TEMPERATURE RANGE: -20°C TO 60°C.

ANGLE	±5°	MODEL NAME: SJ3510N-5P (PART NO.)		 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.				
63 < L	±0.5	MAT'L: See table	DESIGN: Z.F.Lian 08/16'18	TITLE: 3.5 PHONE JACK				
16 < L ≤ 63	±0.4			FINISH: See table	CHECKED: L.W.Wu 08/16'18	DWG NO.:	REV.:	
4 < L ≤ 16	±0.3	Q'TY: /	APPROVED: X.Q.Hu 08/16'18				UNIT: mm	VIEW: 
L ≤ 4	±0.2			THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO. LTD., NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				