




REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

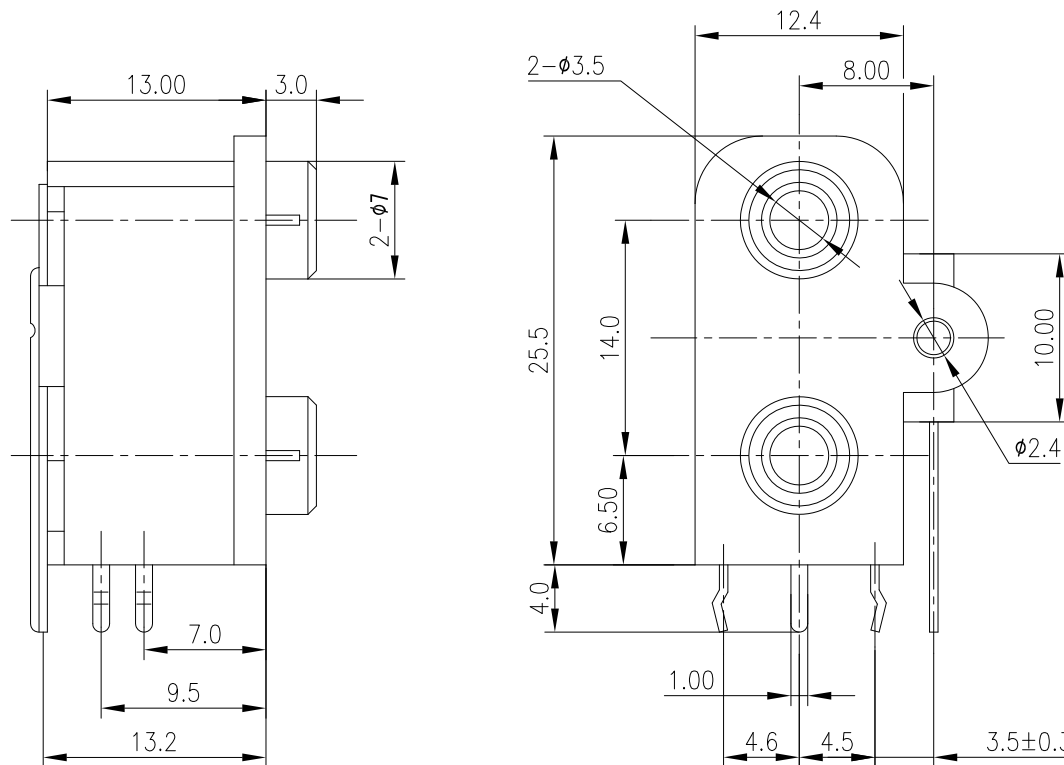

NOTES:
ELECTRICAL:
1:RATED CURRENT: 1A Max.
2:RATED VOLTAGE: 30V AC.
3:CONTACT RESISTANCE: 100 MILLIOHMS Max.
AFTER TESTING:100 MILLIOHMS Max.
4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
MECHANICAL:
1:INSERTION FORCE: 3N-25N.
2:WITHDRAWAL FORCE: 3N-25N.
3:DURRABILITY: 5000 CYCLES.
ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TO 60°C.



SCHEMATIC

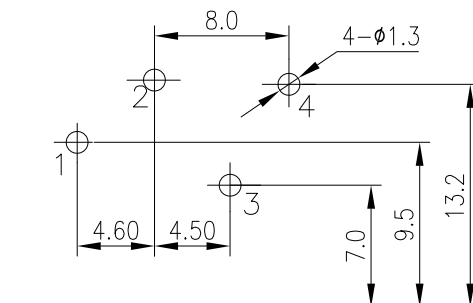

PCB LAYOUT
TOP VIEW

ANGLE	$\pm 5^\circ$	MODEL NAME: SJ3512 (PART NO.)		 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.	
63 < L	± 0.5				
16 < L $\leq$ 63	± 0.4				
4 < L $\leq$ 16	± 0.3				
L $\leq$ 4	± 0.2				
TOL TABLE:		MAT'L: See table		DESIGN: Z.F.Lian 08/16'18	
THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO. LTD.,NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		FINISH: See table		CHECKED: L.W.Wu 08/16'18	
		Q'TY: /		APPROVED: X.Q.Hu 08/16'18	
				TITLE: 3.5 PHONE JACK	
		UNIT: mm		VIEW: 	
		SCALE: 5:1		SHEET: 1/1	
				SIZE: A3	
				REV.: A	