
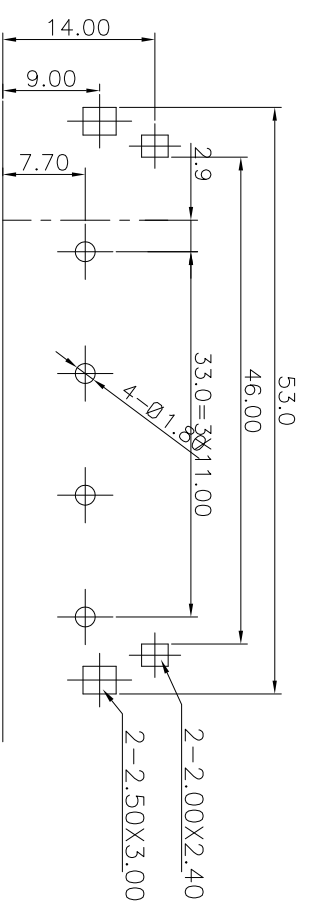
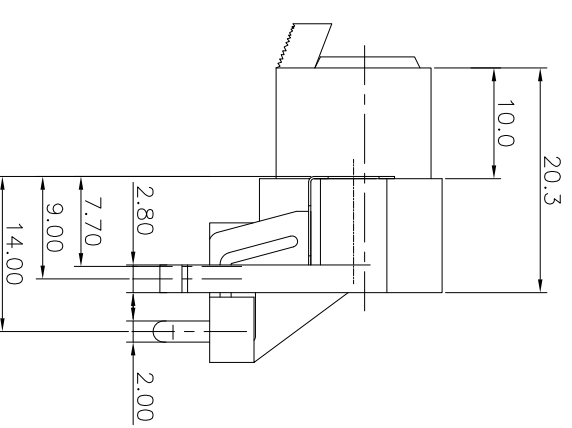


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

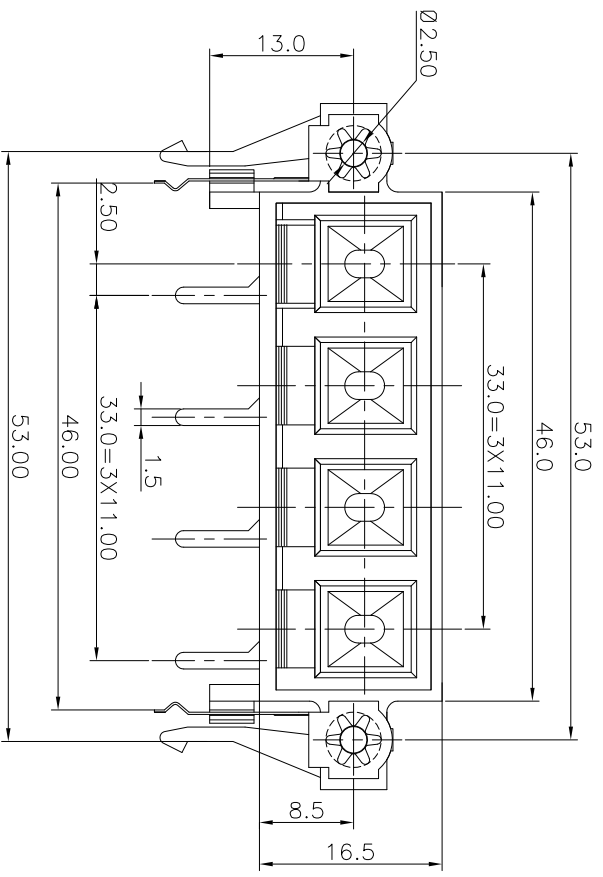

PCB LAYOUT  
TOP VIEW

- NOTES:
- ELECTRICAL:
- 1:RATED CURRENT: 3A Max.
  - 2:RATED VOLTAGE: 50V AC.
  - 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
  - 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.
- MECHANICAL:
- 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
  - 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.
  - 3:APPLY 2kgf FORCE AT ANY DIRECTION, THERE NO LOOSE & NO CRACK

ANGLE	±5°	MODEL NAME: WP4-1B/E (PART NO.)	DESIGN: X.H.Wang 11/06'18	TITLE: WP PUSH TERMINAL
63 < L	±0.5	MAT'L: See table	CHECKED: L.W.Wu 11/06'18	DWG NO.:
16 < L ≤ 63	±0.4	FINISH: See table	APPROVED: X.Q.Hu 11/06'18	UNIT: mm
4 < L ≤ 16	±0.3	Q'TY: /		VIEW:
L ≤ 4	±0.2			SCALE: 5:1
TOL TABLE:				
THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				
GUANGDONG TRENPRO TECHNOLOGY CO., LTD.		广东正宝科技有限公司		