
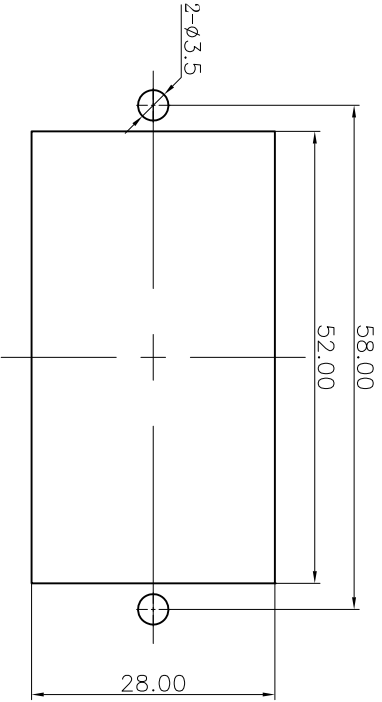
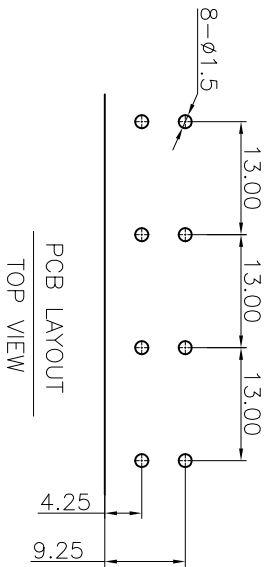


REV. A	ECN NO.	MODIFIED MARK	APPROVED
		FIRST RELEASE	

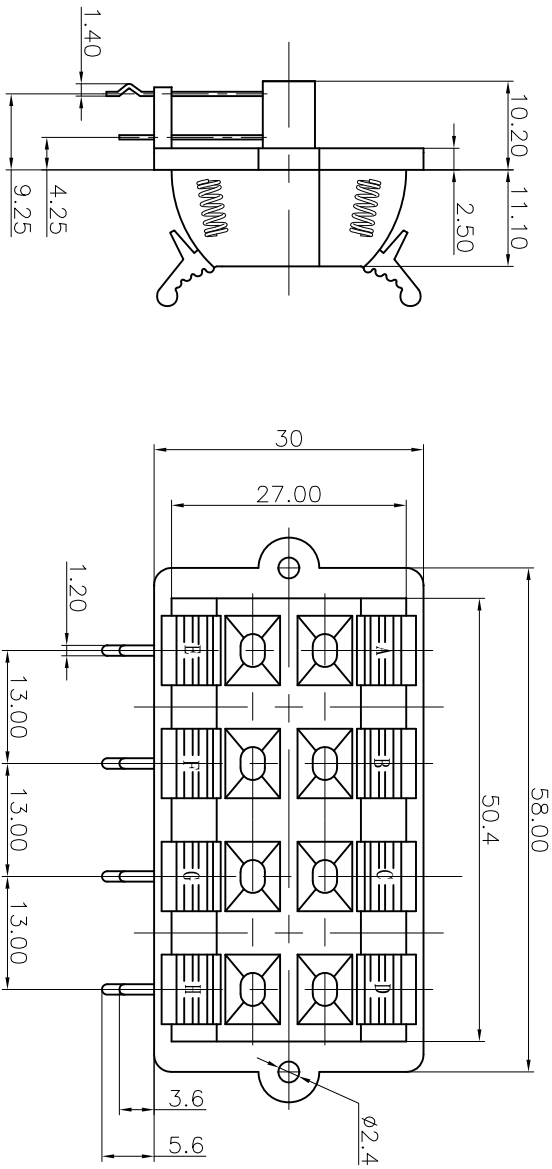

NOTES:
 ELECTRICAL:
 1:RATED CURRENT: 3A Max.
 2:RATED VOLTAGE: 50V AC.
 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
 4:IELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.
 MECHANICAL:
 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

ANGLE	±5°
63 < L	±0.5
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

TOL TABLE:
 THIS DOCUMENT IS THE PROPERTY OF
 TERPRO TECHNOLOGY CO., LTD.,NO PART
 THEREOF MAY BE REPRODUCED AND
 USED WITHOUT THE PRIOR WRITTEN
 CONSENT OF THE OWNER

MODEL NAME: WP8-3 (PART NO.)	DESIGN: X.H.Wang	DATE: 10/23'18	TITLE: WP PUSH TERMINAL
MAT'L: See table	CHECKED: L.W.Wu	DATE: 10/23'18	DWG NO.:
FINISH: See table	APPROVED: X.Q.Hu	DATE: 10/23'18	UNIT: mm
Q'TY: /			VIEW: 5:1
			SCALE: SHEET: 1/1
			SIZE: A3



广东正宝科技有限公司
 GUANGDONG TERPRO TECHNOLOGY CO., LTD.

