
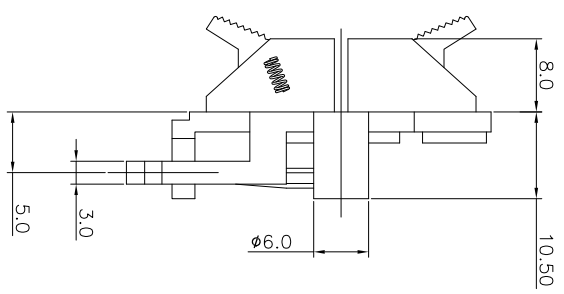


|      |         |               |          |
|------|---------|---------------|----------|
| REV. | ECN NO. | MODIFIED MARK | APPROVED |
| A    |         | FIRST RELEASE |          |

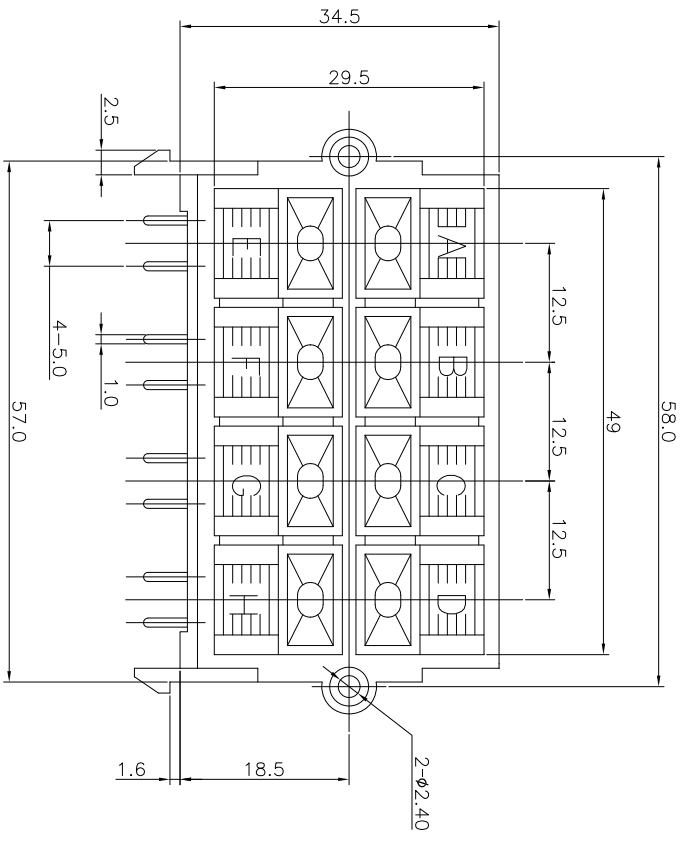


NOTES:

ELECTRICAL:


- 1:RATED CURRENT: 3A Max.
- 2:RATED VOLTAGE: 50V AC.
- 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
- 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.

MECHANICAL:


- 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
- 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

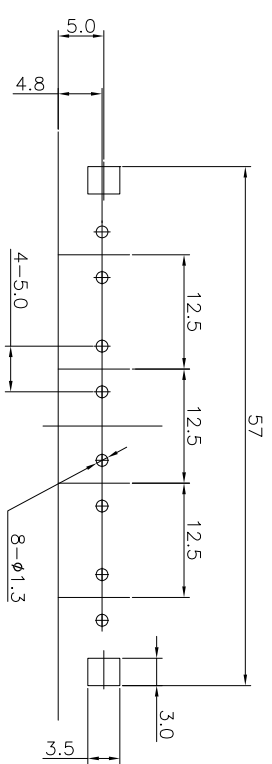


PCB LAYOUT  
TOP VIEW

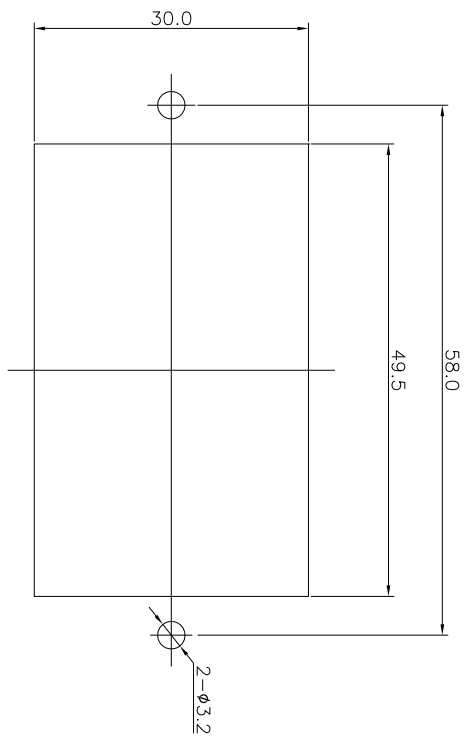

PANEL CUT OUT

|             |      |                           |   |
|-------------|------|---------------------------|---|
| ANGLE       | ±5°  | MODEL NAME: WP8-5         | <br>广东正宝科技有限公司<br>GUANGDONG TRENPRO TECHNOLOGY CO., LTD. |
| 63 < L      | ±0.5 | (PART NO.)                |   |
| 16 < L ≤ 63 | ±0.4 | DESIGN: X.H.Wang 11/06'18 | TITLE: WP PUSH TERMINAL   |
| 4 < L ≤ 16  | ±0.3 | MAT'L: See table          | CHECKED: L.W.Wu 11/06'18  |
| L ≤ 4       | ±0.2 | FINISH: See table         | DWG NO.:  |

|   |  |  |  |         |                           |          |  |            |            |          |
|---|--|--|--|---------|---------------------------|----------|--|------------|------------|----------|
| TOL TABLE:  |  |  |  | Q'TY: / | APPROVED: X.Q.Hu 11/06'18 | UNIT: mm | VIEW:  | SCALE: 5:1 | SHEET: 1/1 | SIZE: A3 |
| THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER |  |  |  |         |                           |          |  |            |            |          |