


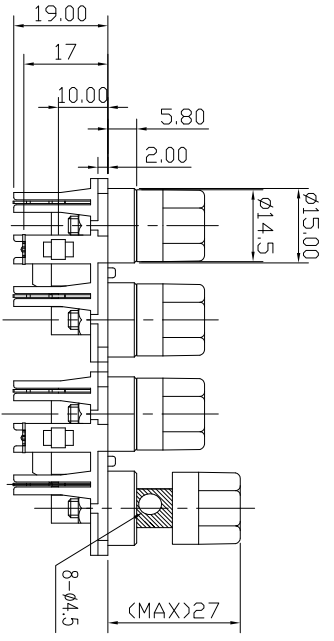
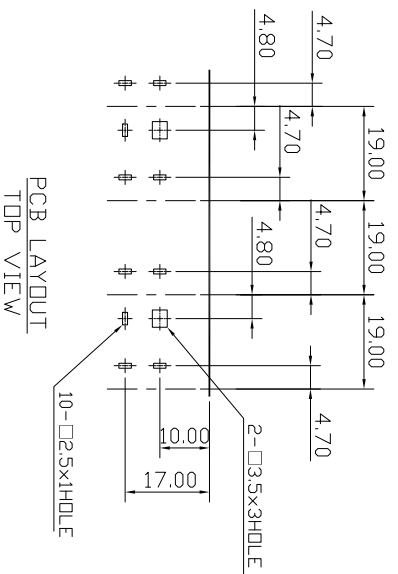
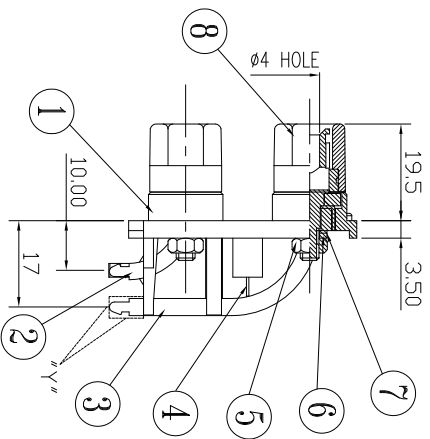


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	20180428001	FIRST RELEASE	Jack Zhou

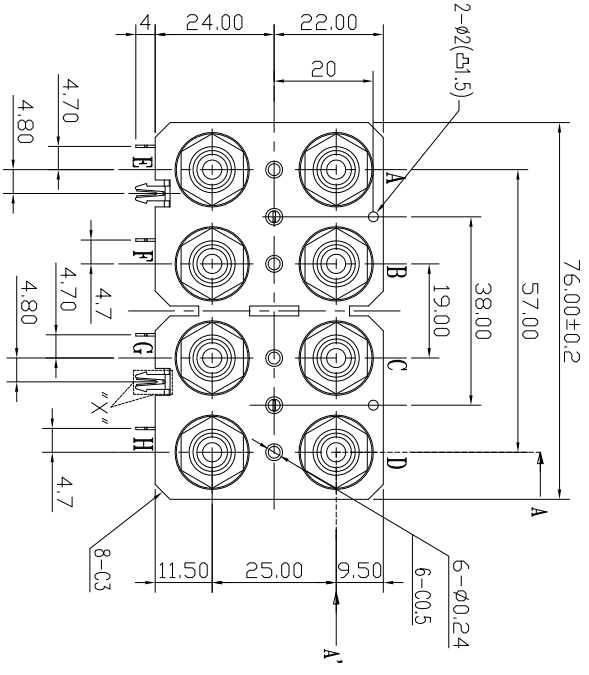

NOTES:
 ELECTRICAL:
 1:RATED CURRENT: 3A Max.
 2:RATED VOLTAGE: 30V DC(RMS),
 3:WIRE IN HOLD FORCE 5N (20#/WIRE) MIN.
 4:INSULATION RESISTANCE: 100 MEGADHMS Min.
 5:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.
 MECHANICAL:
 ENVIRONMENTAL:
 TEMPERATURE RANGE: -40°C TO 70°C.

X. ±0.35	X.* ±5	MODEL NAME: WP8-32B (PART NO.)	TITLE: WP8-32B (CUSTOMER)
X ±0.30	X.* ±2.5		
.XX ±0.25	.XX.* ±1.5	DESIGN: LingZhiFeng 04/28'18	DWG NO.:
TOL TABLE:		CHECKED: Jack Zhou 04/28'18	REV.: A
FINISH: See table		APPROVED: HuXiaoQu 04/28'18	UNIT: mm
MATERIAL: See table		QTY: /	VIEW:

THIS DOCUMENT IS THE PROPERTY OF ZHENGMET ELECTRONICS CO.,LTD.AND PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER.

广东正宝科技有限公司
 GUANGDONG TRENDPRO TECHNOLOGY CO. LTD.