

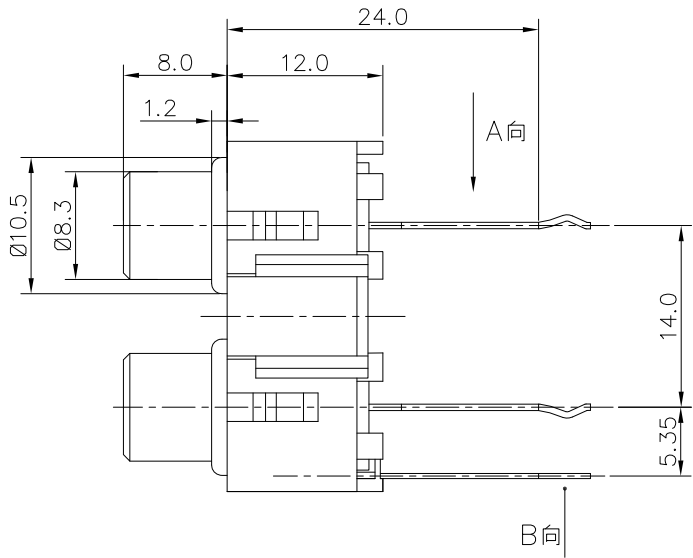




REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

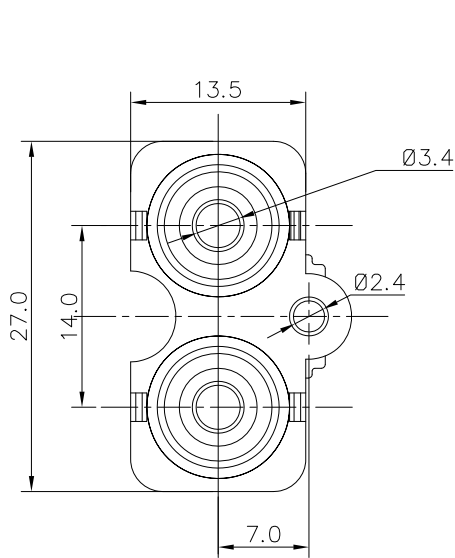


NOTES:
ELECTRICAL:
1:RATED CURRENT: 0.2A Max.
2:RATED VOLTAGE: 50V AC.
3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
AFTER TESTING:100 MILLIOHMS Max.
4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
MECHANICAL:
1:INSERTION FORCE: 3N-30N.
2:WITHDRAWAL FORCE: 3N-30N.
3:DURRABILITY: 100 CYCLES.
ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TO 60°C.



PCB LAYOUT
TOP VIEW

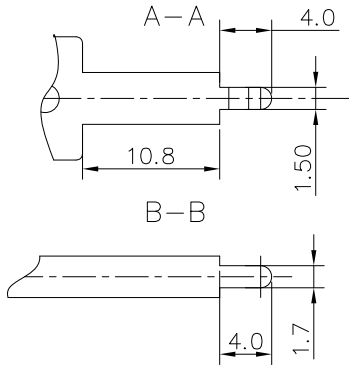

SCHEMATIC

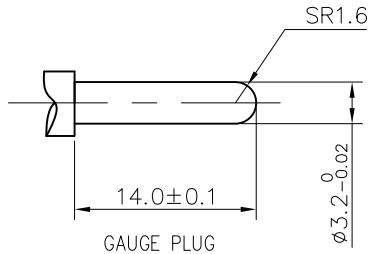

广东正宝科技有限公司
GUANGDONG TRENPRO TECHNOLOGY CO. LTD.

ANGLE	±5°	MODEL NAME: RCA-206B (PART NO.)		TITLE: RCA PIN JACK			
63 < L	±0.5						
16 < L ≤ 63	±0.4						
4 < L ≤ 16	±0.3						
L ≤ 4	±0.2	MAT'L: See table		DESIGN: X.H.Wang 08/13'18			
TOL TABLE: THIS DOCUMENT IS THE PROPERTY OF ZHENGWEI ELECTRONICS CO.,LTD.,NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		FINISH: See table		CHECKED: L.W.Wu 08/13'18		DWG NO.:	
		Q'TY: /		APPROVED: X.Q.Hu 08/13'18		REV.: A	
				UNIT: mm		VIEW:	
				SCALE: 5:1		SHEET: 1/1	
						SIZE: A3	