

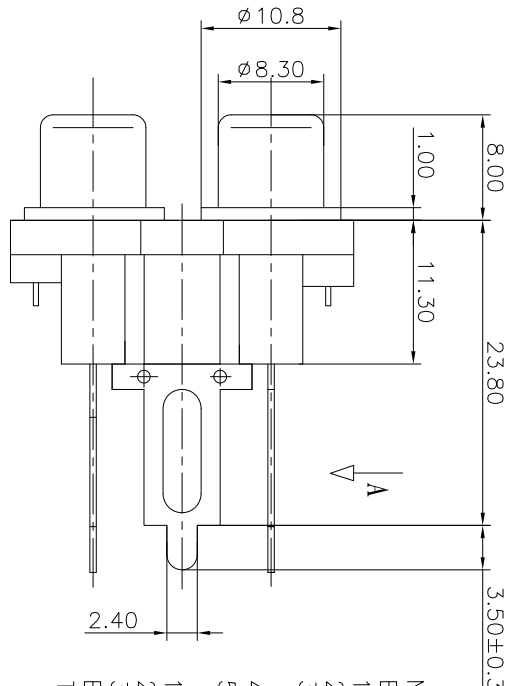
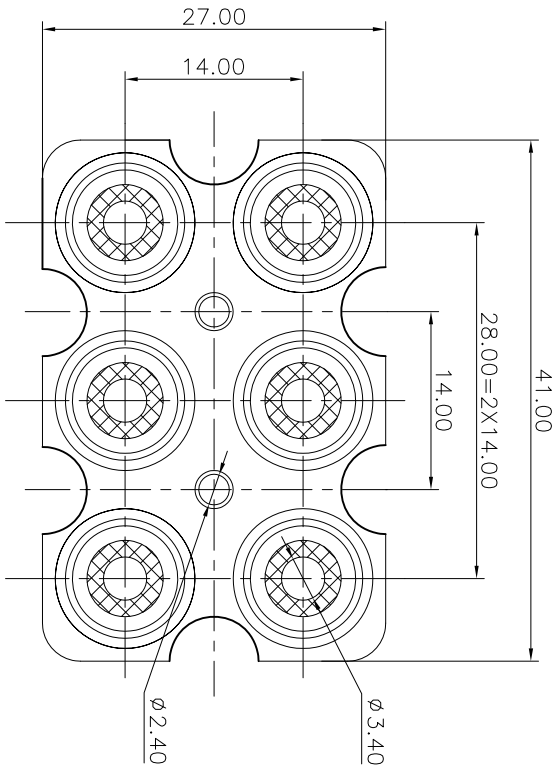
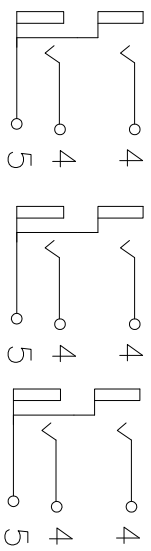


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	




NOTES:
ELECTRICAL:
1:RATED CURRENT: 0.2A Max.
2:RATED VOLTAGE: 50V AC.
3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
AFTER TESTING:100 MILLIOHMS Max.
4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
MECHANICAL:
1:INSERTION FORCE: 3N-30N.
2:WITHDRAWAL FORCE: 3N-30N.
3:DURABILITY: 100 CYCLES.
ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TO 60°C.

A向



SCHEMATIC

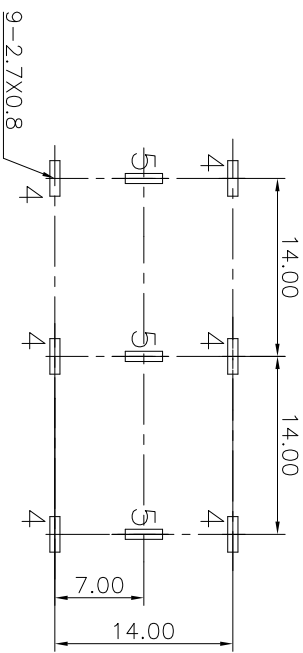

PCB LAYOUT
TOP VIEW

ANGLE	±5°	MODEL NAME: RCA-607F (PART NO.)		广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.
63 < L	±0.5			
16 < L ≤ 63	±0.4			
4 < L ≤ 16	±0.3			
L ≤ 4	±0.2			
TOL TABLE:				
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD., NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				
MAT'L:	See table	DESIGN: Z.F. Lion	11/29'18	TITLE: RCA PIN JACK
FINISH:	See table	CHECKED: L.W. Wu	11/29'18	DWG NO.:
Q'TY: /		APPROVED: X.Q. Hu	11/29'18	UNIT: mm
				VIEW: 5:1
				SCALE: SHEET: 1/1
				SIZE: A3
				REV.: A