
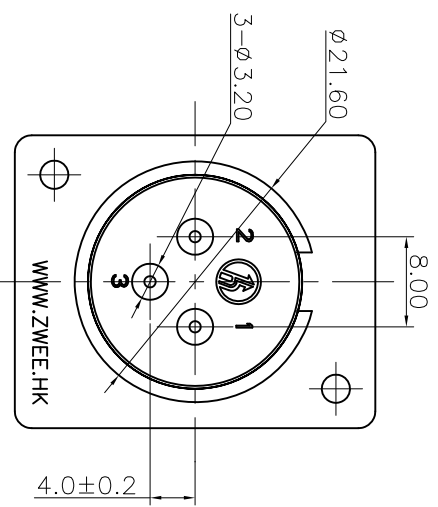


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

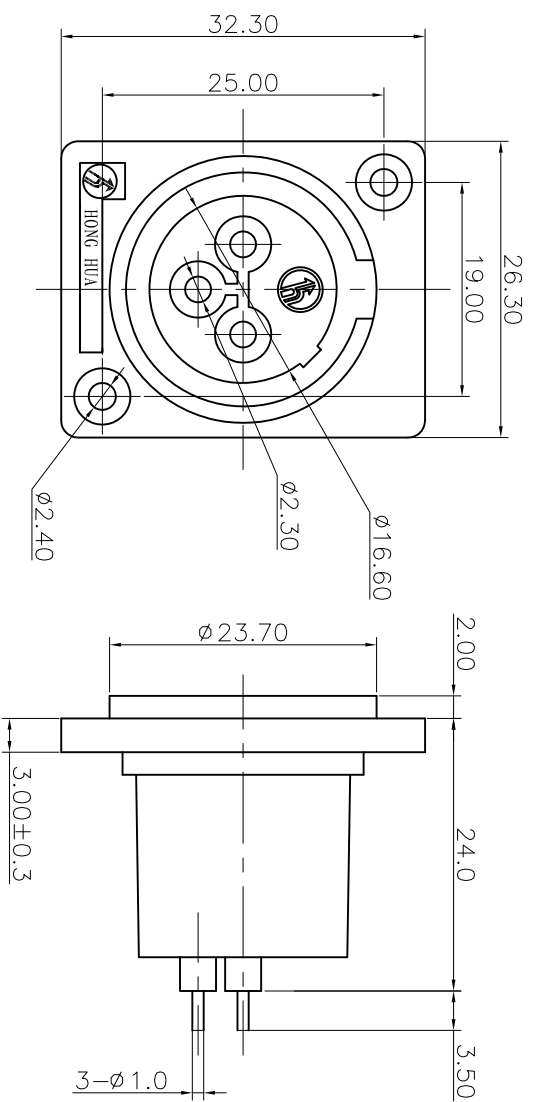



NOTES:

ELECTRICAL:

- 1: RATED CURRENT: 6A Max.
- 2: RATED VOLTAGE: 50V AC.
- 3: CONTACT RESISTANCE: 30 MILLIOHMS Max. AFTER TESTING: 60 MILLIOHMS Max.
- 4: INSULATION RESISTANCE: 1G OHMS Min.
- 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:

- 1: INSERTION FORCE: 5N-40N.
 - 2: WITHDRAWAL FORCE: 5N-40N.
 - 3: DURABILITY: 1000 CYCLES.
- ENVIRONMENTAL:
TEMPERATURE RANGE: -30°C TO 80°C.

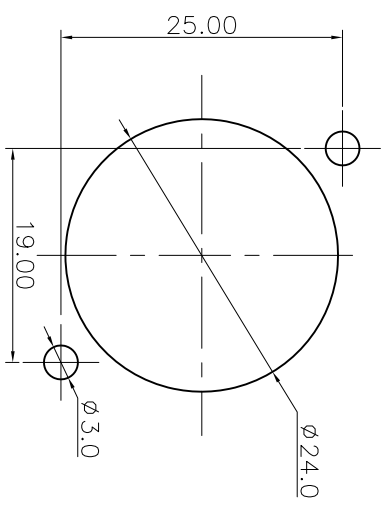

PANEL CUT OUT

ANGLE	±5°
63 < L	±0.5
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

TOL TABLE:	
See table	
FINISH:	
See table	
Q'TY: /	

MODEL NAME: SPM-01A (PART NO.)	
DESIGN: X.H.Wong 08/28'18	TITLE: XLR CABLE CONNECTORS
CHECKED: L.W.Wu 08/28'18	DWG NO.:



广东正宝科技有限公司
GUANGDONG TRENPPO TECHNOLOGY CO., LTD.

THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. AND PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER	
REVIEW:	A
SCALE:	5:1
SHEET:	1/1
SIZE:	A3