
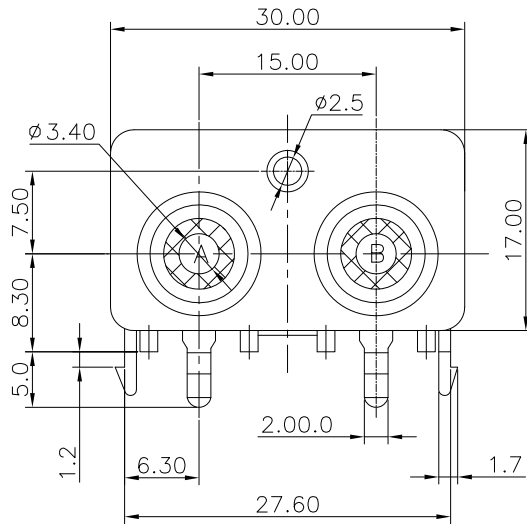


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

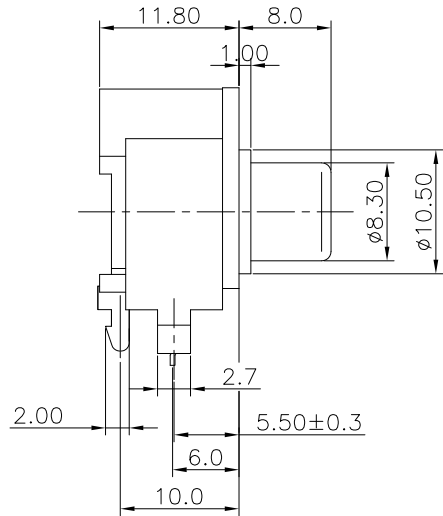

NOTES:

ELECTRICAL:

1:RATED CURRENT: 0.2A Max.

2:RATED VOLTAGE: 50V AC.

3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
AFTER TESTING:100 MILLIOHMS Max.

4:INSULATION RESISTANCE: 100 MEGAOHMS Min.

5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:




1:INSERTION FORCE: 3N-30N.

2:WITHDRAWAL FORCE: 3N-30N.

3:DURRABILITY: 100 CYCLES.

ENVIRONMENTAL:

TEMPERATURE RANGE: -20°C TO 60°C.

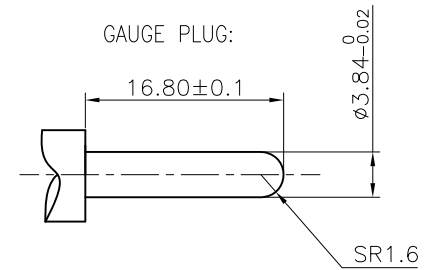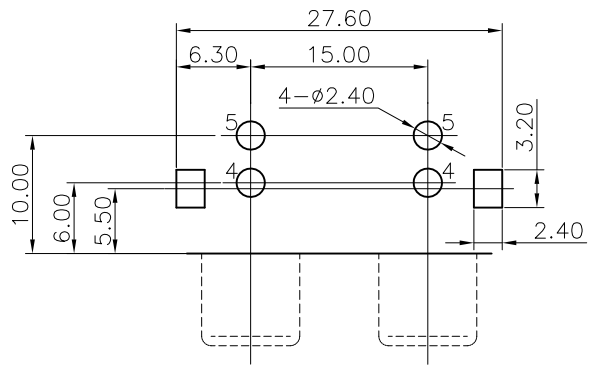

PCB LAYOUT
TOP VIEW

<table border="1"> <tr> <td>ANGLE</td> <td>±5°</td> </tr> <tr> <td>63 < L</td> <td>±0.5</td> </tr> <tr> <td>16 < L ≤ 63</td> <td>±0.4</td> </tr> <tr> <td>4 < L ≤ 16</td> <td>±0.3</td> </tr> <tr> <td>L ≤ 4</td> <td>±0.2</td> </tr> </table>		ANGLE	±5°	63 < L	±0.5	16 < L ≤ 63	±0.4	4 < L ≤ 16	±0.3	L ≤ 4	±0.2	<p>MODEL NAME: RCA-205A (PART NO.)</p>		<p>广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.</p>	
ANGLE	±5°														
63 < L	±0.5														
16 < L ≤ 63	±0.4														
4 < L ≤ 16	±0.3														
L ≤ 4	±0.2														
<p>MAT'L: See table</p>		<p>DESIGN: Z.F.LIAN 10/26'18</p>		<p>TITLE: RCA PIN JACK</p>											
<p>FINISH: See table</p>		<p>CHECKED: L.W.Wu 10/26'18</p>		<p>DWG NO.:</p>											
<p>Q'TY: /</p>		<p>APPROVED: X.Q.Hu 10/26'18</p>		<p>UNIT: mm</p>	<p>VIEW: </p>										
<p>THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO. LTD., NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER</p>			<p>SCALE: 5:1</p>	<p>SHEET: 1/1</p>	<p>SIZE: A3</p>										